



Controlled Documentation

Part Number: 33658

Revision: C


Effective Date: 1/17/17

By: J. INGERSLEV

IRS

INSTALLATION INSTRUCTIONS

ITEM NO.	PART NUMBER	DESCRIPTION	Roadster/Qty.
1	CENTER SECTION		1
2	LEFT SIDE SPINDLE		1
3	RIGHT SIDE SPINDLE		1
4	15857	ANGLED MOUNT ADAPTER	2
5	HBOLT 0.6250-18x3.5x1.5-N		2
6	NLN-625C	NYLON INSERT LOCKNUT	2
7	16078	IRS LEFT UPPER CONTROL ARM	1
8	15898	IRS RIGHT UPPER CONTROL ARM	1
9	15911	IRS RIGHT LOWER CONTROL ARM	1
10	15907	IRS LEFT LOWER CONTROL ARM	1
11	15902	IRS TOE ADJUSTMENT ARM COMPONENTS	2

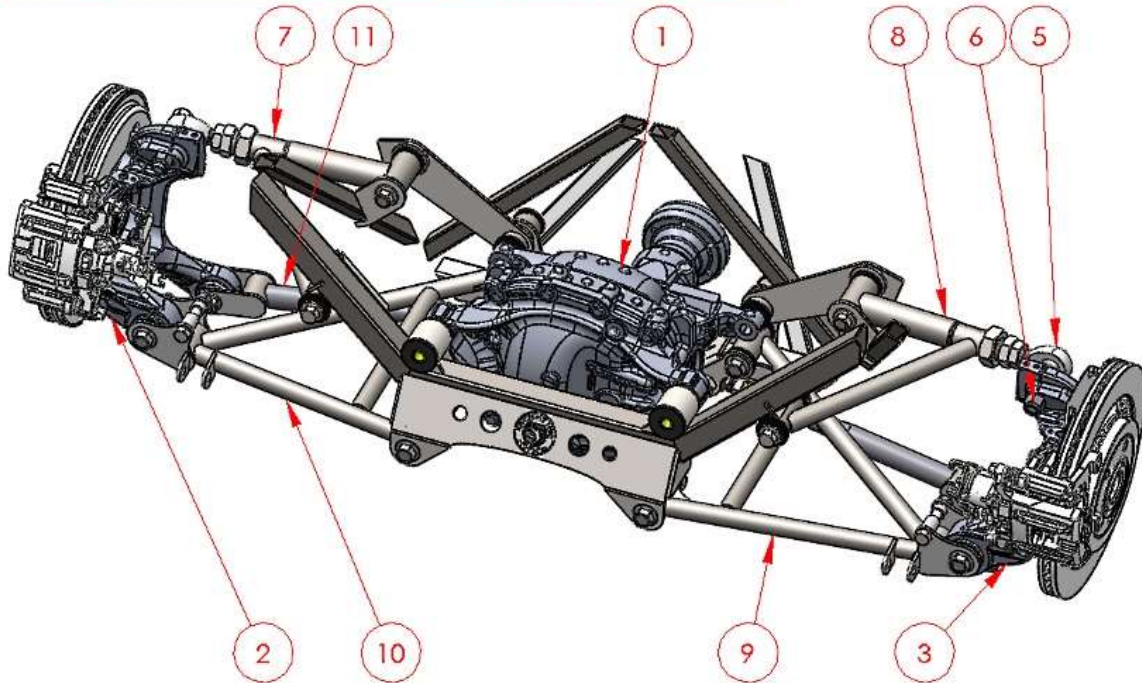

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FACTORY FIVE RACING, INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
FACTORY FIVE RACING, INC. IS
PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES TWO PLACE DECIMAL ±0.01 THREE PLACE DECIMAL ±0.005 FOUR PLACE DECIMAL ±0.001	
MATERIAL	
FINISH	
USED ON	
APPLICATION	PRINTED
ROADSTER/COUPE	8/4/2015



Factory Five Racing, Inc.

ROADSTER/COUPE IRS COMPONENTS

NAME	DATE
JL	3/23/15

DRAWN

COMMENTS

SEE DWG. NO.
A IRS Assembly

SCALE:1:10 WEIGHT:

REV.

A

Roadster/Coupe

ITEM NO.	PART NUMBER	DESCRIPTION	Hot Rod/QTY.
1	15911	IRS RIGHT LOWER CONTROL ARM	1
2	15906	IRS LWR CNTRL ARM COMP.	1
3	15902	IRS TOE ADJUSTMENT ARM COMPONENTS	2
4	33998	UPPER CONTROL ARM	1
5	34025	34025 - IRS RIGHT UPPER CNTRL ARM	1
6	CENTER SECTION		1
7	LEFT SIDE SPINDLE		1
8	RIGHT SIDE SPINDLE		1

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FACTORY FIVE RACING, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FACTORY FIVE RACING, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES: TWO PLACE DECIMAL ±0.01 THREE PLACE DECIMAL ±0.005 FOUR PLACE DECIMAL ±0.001	NAME: JI DATE: 3/23/15	 Factory Five Racing, Inc. HOT ROD IRS COMPONENTS SEE DWG. NO. A IRS Assembly SCALE: 1:8 WEIGHT: SHEET 4 OF 4
	MATERIAL:	ENG APPR. MFG APPR. Q.A.	
	FINISH:	COMMENTS:	
	USED ON: APPLICATION: HOT ROD	PRINTED: 8/17/2015	

Hot Rod

Table of Contents

Parts Included in Kit	3
Parts needed	3
Mustang IRS Specifications	3
Tools required	4
Parts preparation	4
Spindles	4
Hubs	6
Center section	9
Frame	9
Upper control arms	12
Lower control arms	13
Toe adjustment arms	14

Installation.....	14
Center section	14
Toe Adjustment arms.....	18
Lower control arms	18
Upper control arms	19
CV Axle	21
Spindle	24
Coil-Over Shock Assembly	26
Brakes.....	Error! Bookmark not defined.
Driveshaft adapter.....	37
Fluids	39
Capacities	39
Alignment specs.....	40
Torque Specifications	40

Parts Included in Kit

IRS frame mount (welded to frame)
 L&R lower control arms
 L&R upper control arms
 Toe arms
 L&R CV axles
 Koni coil-over shocks
 Springs
 Fasteners
 Driveshaft adapter

Parts needed

- 2015 or newer Ford Mustang IRS parts
 - Super 8.8" center section
 - L&R spindles
 - L&R brake parts

Mustang IRS Specifications

	2.3L Ecoboost	3.7L V6	5.0L Coyote
Housing	Steel	Aluminum	Steel
Weight	93lb	78lb	93lb
Gear Ratios	3.15:1, 3.31:1, 3.55:1	3.15:1, 3.55:1	3.15:1, 3.55:1
Brakes	12.6" (320mm) Solid rotor, 45mm single piston aluminum caliper	12.6" (320mm) Solid rotor, 45mm single piston aluminum caliper	13.0" (330mm) Vented rotor, 45mm single piston iron caliper

Tools required

Philips head screwdriver

$\frac{5}{8}$ " Drill bit

$\frac{13}{16}$ " , $\frac{15}{16}$ " wrenches

$\frac{13}{16}$ " , $\frac{15}{16}$ " 18mm Sockets

Large adjustable wrench – up to $1\frac{5}{8}$ "

$\frac{1}{8}$ " Hex Key

Marker

Ruler

Hacksaw

Drill

Plastic mallet

Hammer

Torque wrench

Parts preparation


SPINDLES

✂ $\frac{5}{8}$ " drill bit, drill, saw, marker


Remove the brake calipers from the spindle if they are mounted. They will be reinstalled after the spindle is put on the car.



Use a $\frac{5}{8}$ " drill bit to drill out the tapered hole at the top of the spindle.

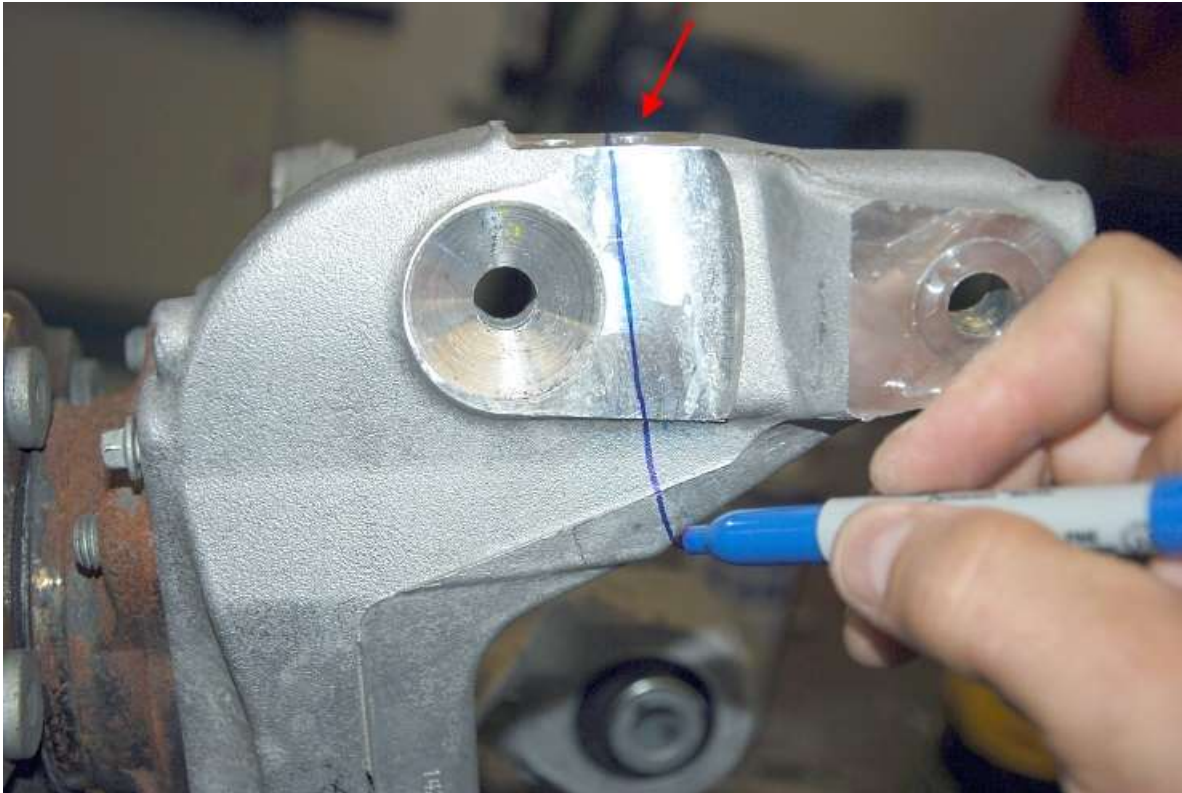

Mark the spindle starting at the top just to the inside of the top inside hole down to the corner of the small boss at the bottom of the ear.

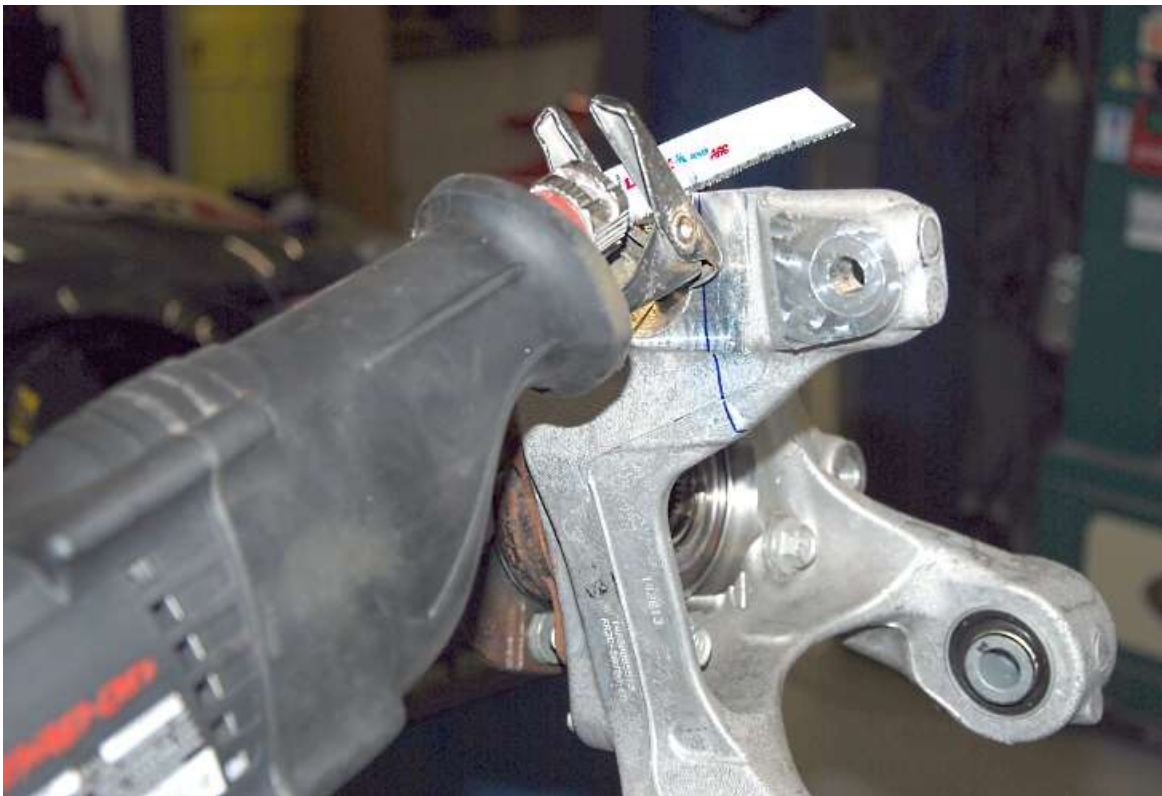

Use a saw to cut the ear off the spindle. If using a Sawzall or similar, use a wood blade; a 14tpi blade or finer will just get gummed up with the aluminum.

HUBS



Hammer, vise, ratchet, ½"-20 lugnut, torque wrench.




Rear wheel studs.




Removal of the hub from the spindle is not necessary but can make things easier.



Use a vise to lightly hold the side of the wheel stud head then use a hammer to bang out the Mustang studs. Repeat for all of the studs.

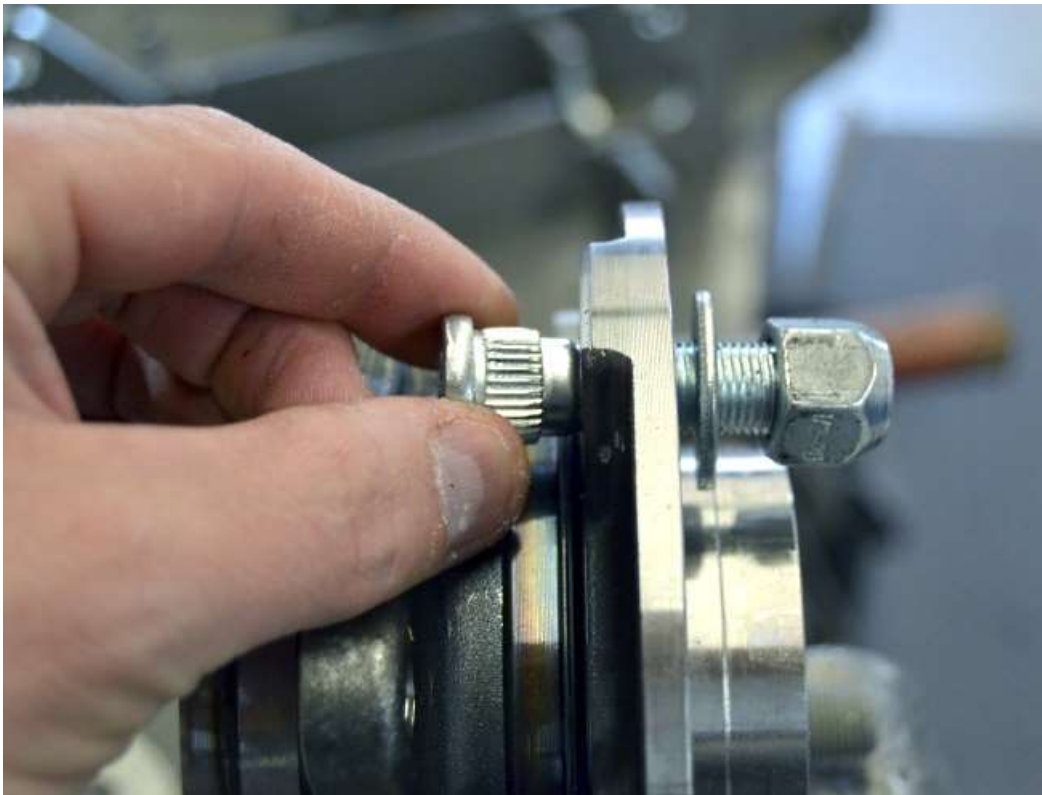

Insert one of the included wheel studs into the hub from the back and use a washer and lug nut on the front side.

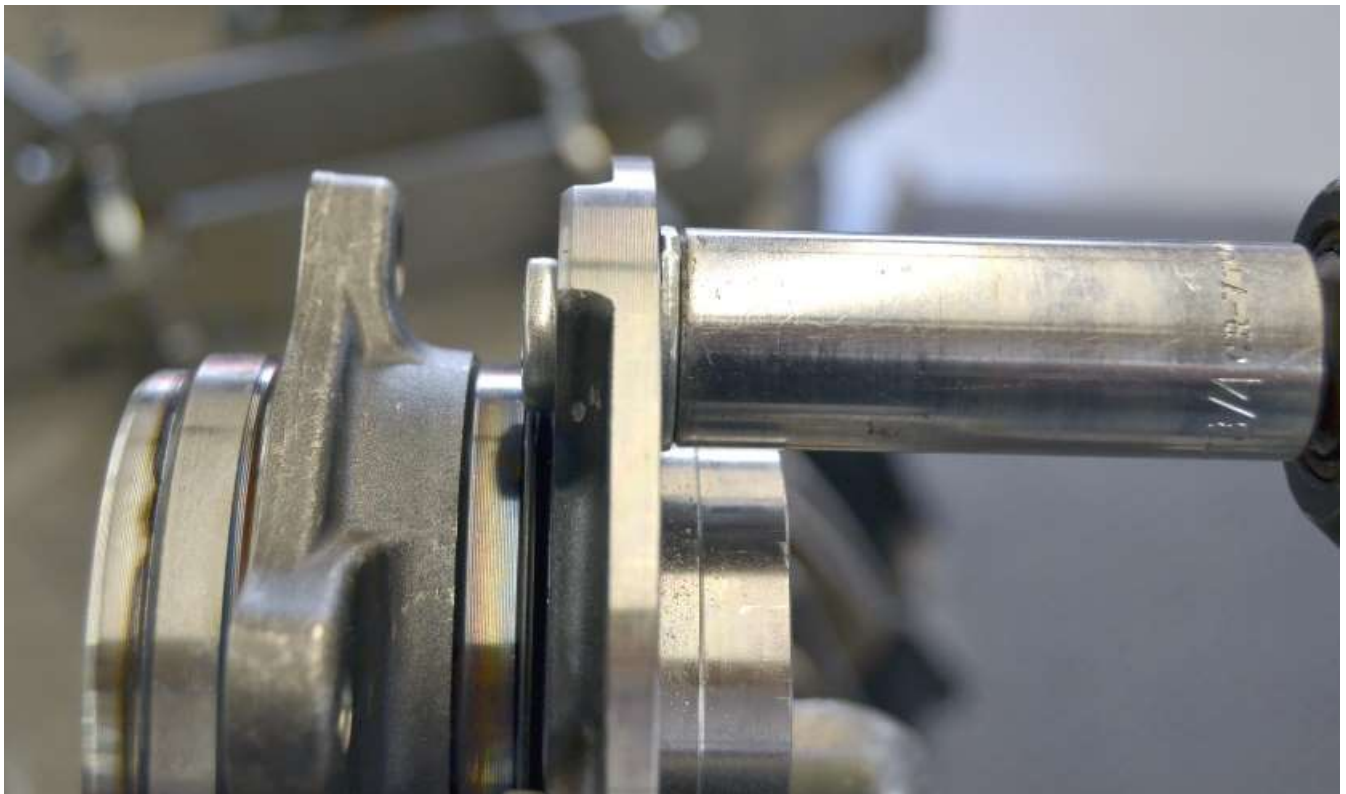

Use a ratchet to draw the wheel stud into the hub and torque the stud to **135Nm (100lb-ft)**.



Repeat for the other wheel studs.



If the Hub was removed, use Loctite on the threads and reattach to the spindle.

Torque the bolts to **133Nm (98ft-lb)**.

CENTER SECTION


- ✂ $\frac{5}{8}$ " drill bit, drill.




Use a $\frac{5}{8}$ " drill bit to chase the front mount holes on the center section.

FRAME

- ✂ Rubber/plastic mallet
- 🔧 Differential mounting components

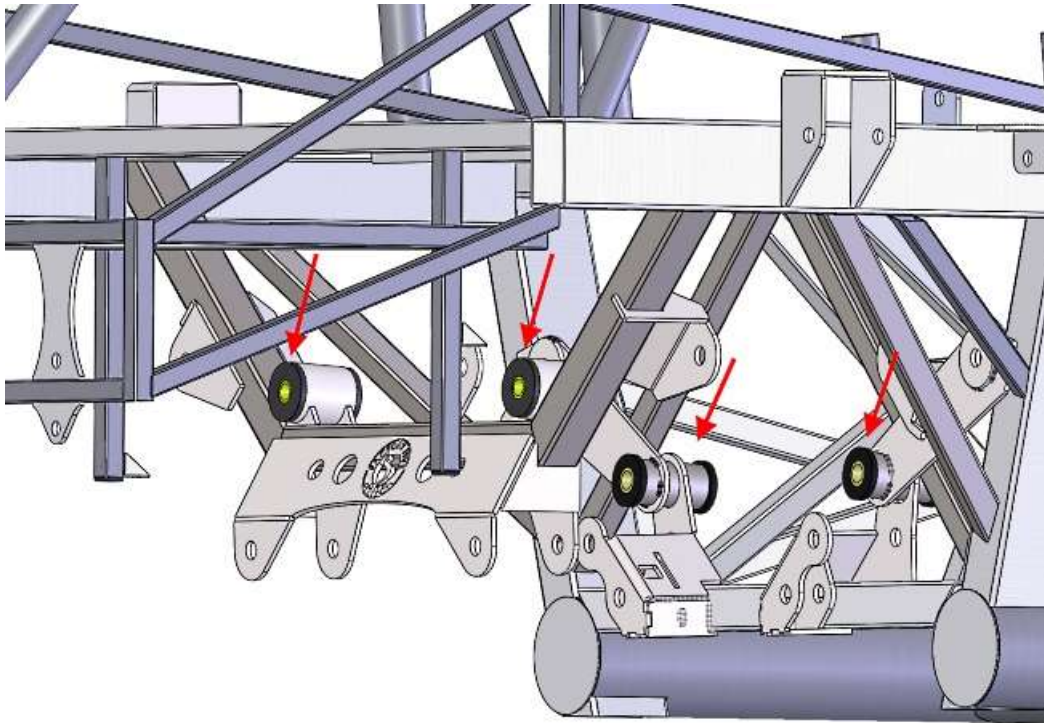

Roadster/Coupe bushing locations.

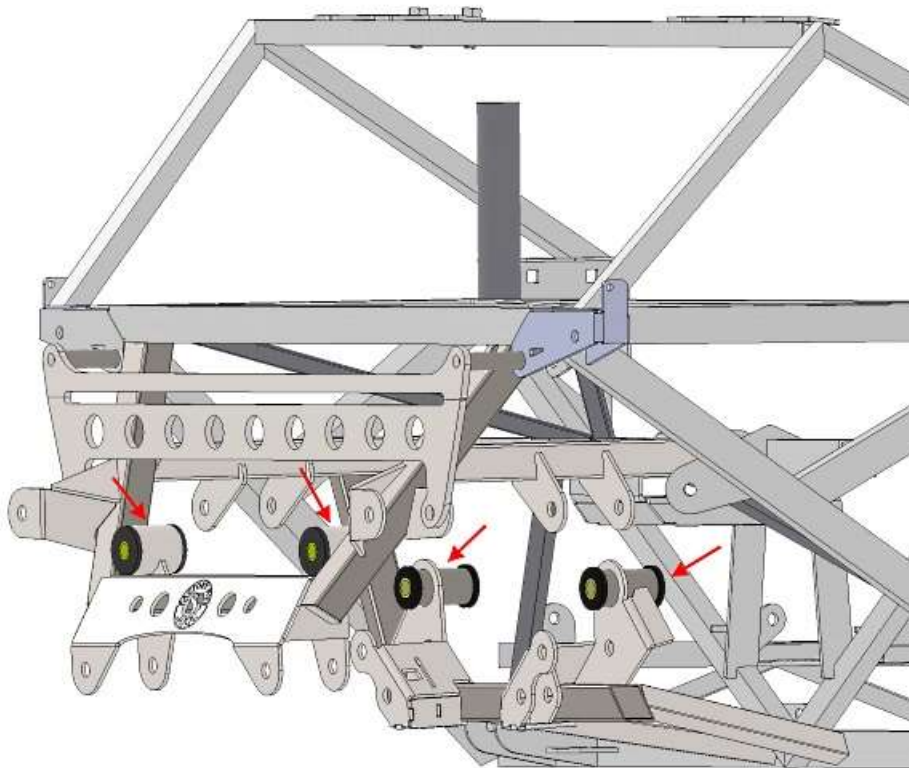

Hot Rod bushing locations.





Use a plastic mallet to install the polyurethane bushings marked 2048 and the longer (3¹/₁₆") sleeves where the front of the center section will mount.



Use a plastic mallet to install the polyurethane bushings marked 2123 and the shorter (2.40") sleeves where the rear of the center section will mount.


UPPER CONTROL ARMS

-  Upper control arm components
-  Grease gun

Roadster

ITEM NO.	PART NUMBER	DESCRIPTION	Default/ QTY.
1	15890	7/8"-14 LH THREAD ROD END	1
2	HJNUT 0.8750-14-D-N		1
3	12257	PIVOT SLEEVE	2
4	15889	7/8"-1.25" ADJUSTER BUNG	1
5	13137	POLYURETHANE BUSHING	4
6	15898	IRS UPPER ARM, RIGHT SIDE	1
7	HJNUT 1.2500-12-D-N		1
8	12226	GREASE NIPPLE	2
9	B18.2.3.4M - Hex flange screw, M16 x 2.0 x 110 --38N		2
10	AM-M16-N		2

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/31/14	

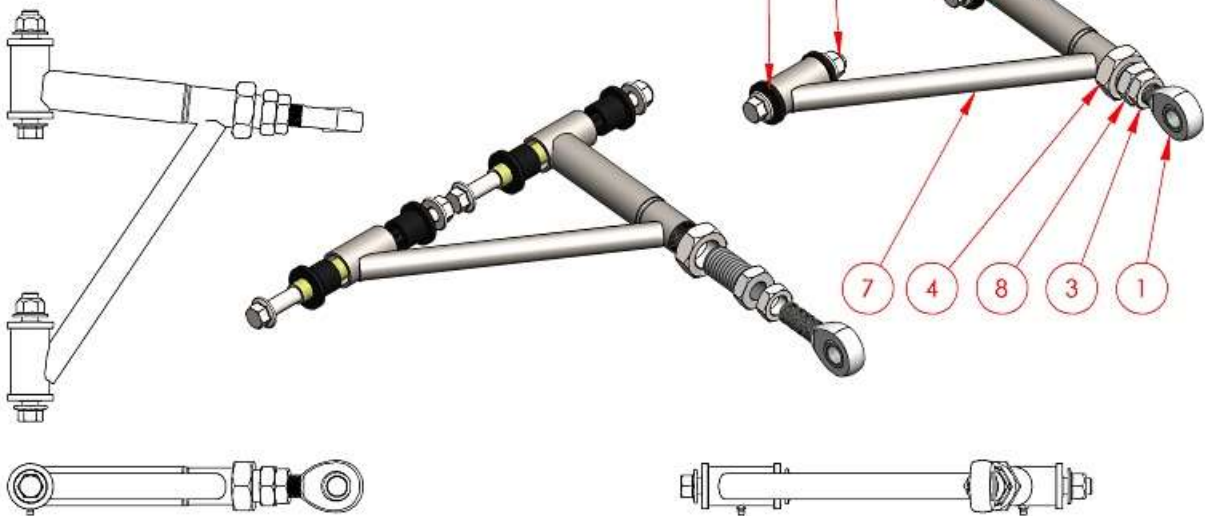

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FACTORY FIVE RACING, INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
FACTORY FIVE RACING, INC. IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	NAME	DATE	Factory Five Racing, Inc.	
ROADSTER	JJ	11/20/14	TITLE:	
COUPE	COMMENTS:		15898 - IRS RIGHT UPPER CNTRL ARM	
DIMENSIONS ARE IN INCHES TOLERANCES: TWO PLACE DECIMAL ±0.01 THREE PLACE DECIMAL ±0.005 FOUR PLACE DECIMAL ±0.001	MATERIAL		SIZE	DWG. NO.
USED ON	FINISH		A	15899
APPLICATION 2015 IRS	PRINTED	8/17/2015	SCALE: 1:5	WEIGHT:
				REV A
				SHEET 1 OF 1


Assemble each of the upper control arms as shown.

Grease the control arms using chassis grease until the grease comes out of the flutes in the bushings next to the pivot sleeves.

Hot Rod

ITEM NO.	PART NUMBER	DESCRIPTION	34025/QTY.
1	15890	7/8"-1.4 LH THREAD ROD END	1
2	HJNUT 0.8750-14-D-N		1
3	HJNUT 1.2500-12-D-N		1
4	12257	PIVOT SLEEVE	2
5	33998	IRS RIGHT UPPER ARM	1
6	15889	7/8"-1.25" ADJUSTER BUNG	1
7	13137	POLYURETHANE BUSHING	4
8	12228	GREASE NIPPLE	2
9	B18.2.3.4M - Hex flange screw, M16 x 2.0 x 110 --38N		2
10	AM-M16-N		2

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/15/15	

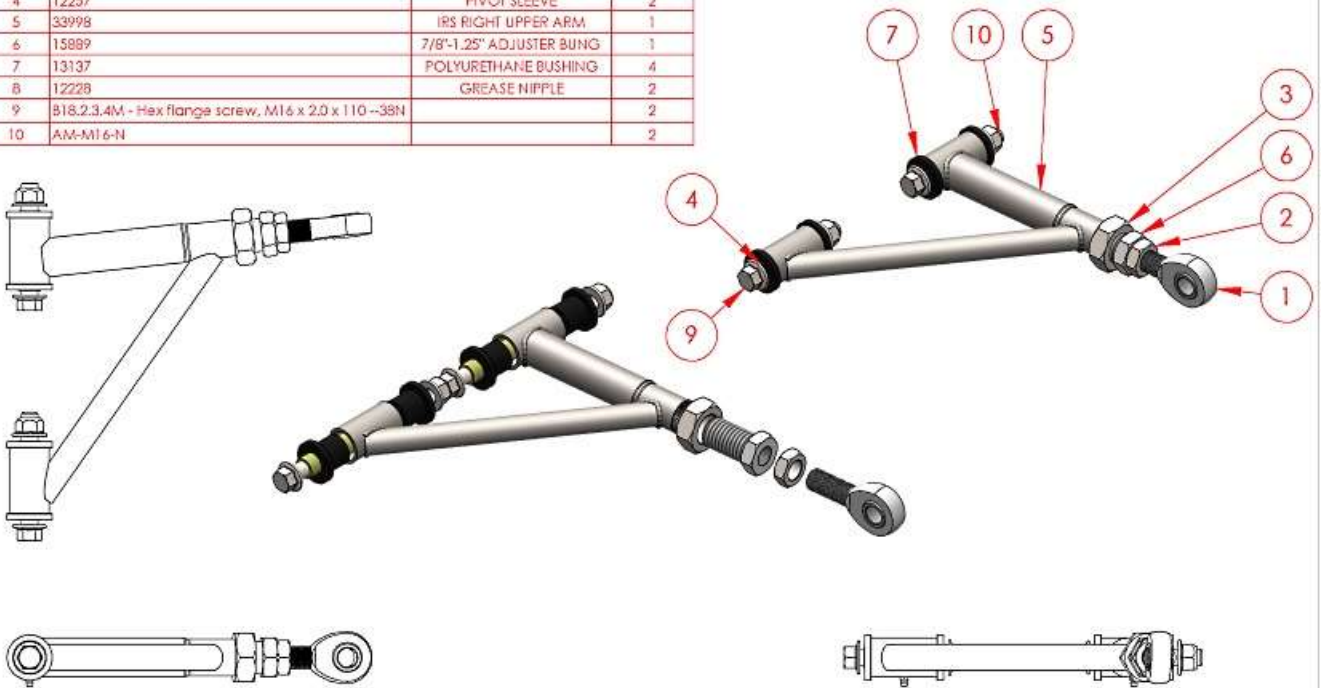

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FACTORY FIVE RACING, INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
FACTORY FIVE RACING, INC. IS
PROHIBITED.

HOT ROD		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	Factory Five Racing, Inc.	
		DIMENSIONS ARE IN INCHES		DRAWN	11/20/15	TITLE:	
		TOLERANCES:		COMMENTS:		34025 - IRS RIGHT UPPER CNTRL ARM	
		TWO PLACE DECIMAL ±0.01				SIZE	DWG. NO.
		THREE PLACE DECIMAL ±0.005				A	33997
		FOUR PLACE DECIMAL ±0.001				REV	A
		MATERIAL				SCALE: 1:5	WEIGHT:
		FINISH				SHEET 1 OF 1	
USED ON		APPLICATION		PRINTED			
2015 IRS		2015 IRS		8/17/2015			

Assemble each of the upper control arms as shown.

Grease the control arms using chassis grease until the grease comes out of the flutes in the bushings next to the pivot sleeves.

LOWER CONTROL ARMS


✂ Grease gun

Grease the control arms using chassis grease until the grease comes out of the flutes in the bushings next to the pivot sleeves.

TOE ADJUSTMENT ARMS

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	33388 - LINKAGE ADJUSTER	LINKAGE ADJUSTER	1
2	12348 3-4 ROD END BODY	12348 - 3/4"-16 THREAD x 5/8" BORE ROD END	1
3	HNUT 0.7500-16-D-N		2
4	15903	IRS TOE ARM	1
5	B18-2.34M- Iflex flange screw, M14 x 2.0 x 60 ~34N		1
6	HNUT 0.6250-11-D-N	15935	1
7	HHBOLT 0.6250-11x2.5x1.25-N	15216	1
8	AM-M14-N		1
9	33240	0.25" SPACER	1
10	15908	0.25" SPACER	1

REV.	REVISION DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/23/15	

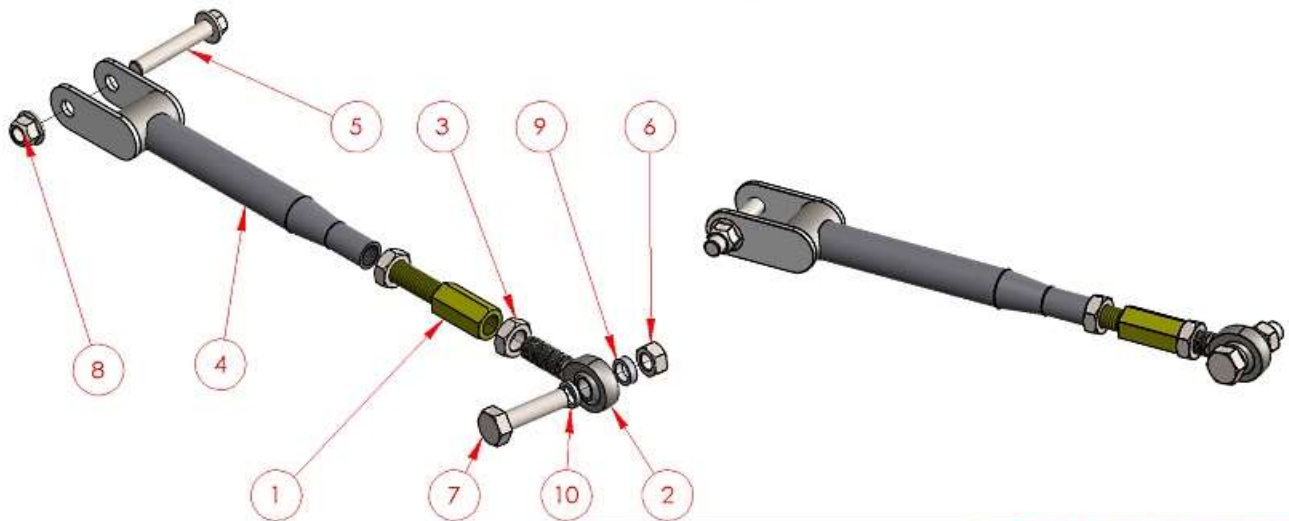




PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FACTORY FIVE RACING, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FACTORY FIVE RACING, INC. IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	Factory Five Racing, Inc.		
ROADSTER	DIMENSIONS ARE IN INCHES	DRAWN	1/6/15	 TITLE: IRS TOE ADJUSTMENT ARM COMPONENT		
COUPE	TOLERANCES:	COMMENTS:				
	TWO PLACE DECIMAL ±0.01					
	THREE PLACE DECIMAL ±0.005					
	FOUR PLACE DECIMAL ±0.001					
	MATERIAL			SIZE	DWG. NO.	REV
	FINISH			A	15902	A
USED ON		PRINTED	5/2/2016	SCALE: 1:4	WEIGHT:	SHEET 1 OF 1
APPLICATION	2015 IRS					

Assemble each of the toe adjustment arms as shown.

Installation

CENTER SECTION

-  Rubber/plastic mallet, torque wrench, 18mm, ¹³/₁₆" sockets, ¹⁵/₁₆" wrench.
-  Differential mounting components.
-  Roadster is shown but Coupe and Hot Rod installation is similar.
-  Use a friend to help with the heavy center section in the next steps.



Use rags to protect between the front center section mount on the frame.



With the help of a friend, lift the center section nose up into the frame and over the front mount.



Flatten the center section out so it is horizontal then back it up so it is above the mount locations and lower it down so the bolts can be installed. The smaller/shorter bolts are used for the rear mounts.



The larger/longer bolts and nuts are used for the front mounts.

Torque both the front and rear bolts to **135Nm (100 ft-lb)**.

TOE ADJUSTMENT ARMS



IRS Toe adjustment arm components



$\frac{13}{16}$ " socket, $\frac{15}{16}$ " wrench, torque wrench.



For Roadster and Coupe only, if using the sway bar option, pass the bolt through the frame mount bracket when installing the toe arms.



Swaybars are not available for the Hot Rod.



Attach the toe arms to the frame below the front lower arm mount using the $\frac{1}{8}$ " thick spacer in the back and the $\frac{1}{4}$ " spacer on the front side of the rod end. Use the $\frac{5}{8}$ " x 2.25" bolts to attach them to the frame.

Torque bolts to **135Nm (100 ft-lb)**.


LOWER CONTROL ARMS



IRS lower control arm components



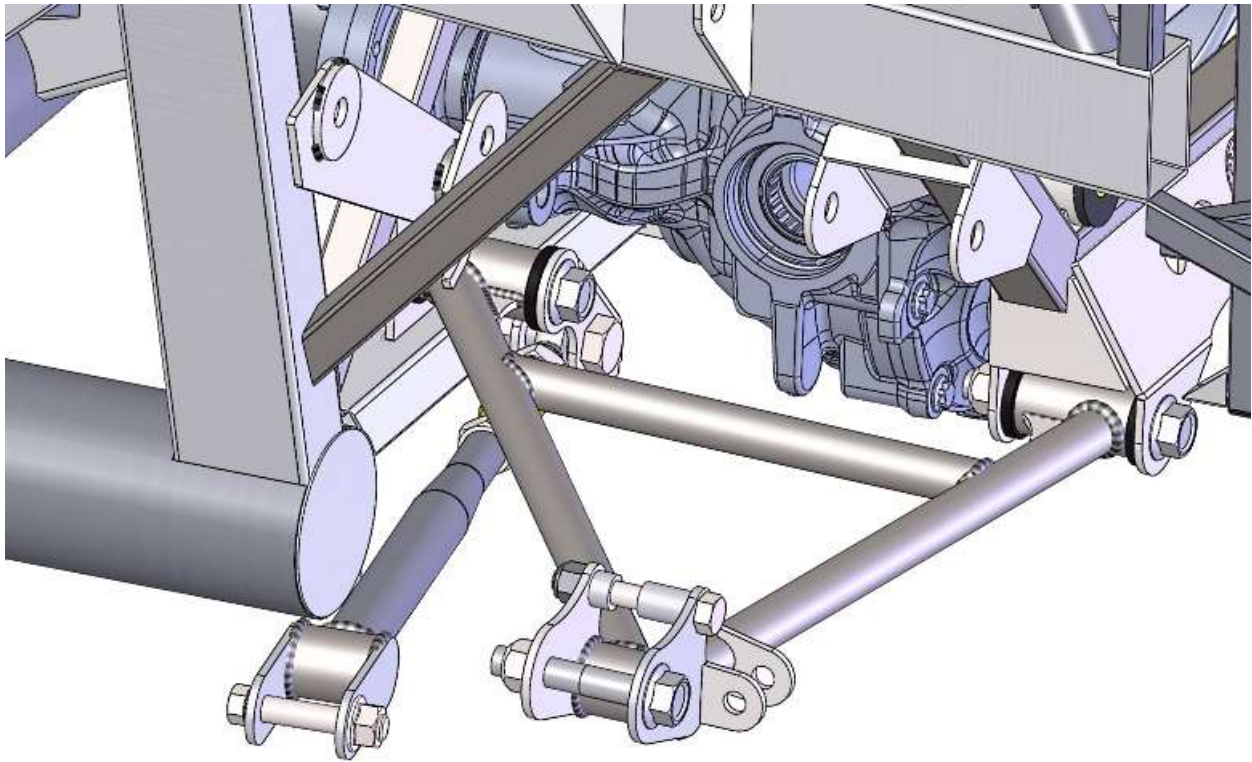

$\frac{13}{16}$ " socket, $\frac{15}{16}$ " wrench, torque wrench.




Attach the control arms to the frame with the shock mount towards the rear and spindle brackets up. Use the longer M16 x 110mm (~4⁵/₁₆"") bolts.

Hold the arm horizontal and torque the bolts to **135Nm (100 ft-lb)**.

UPPER CONTROL ARMS

-  IRS upper control arm components
-  ¹³/₁₆" socket, ¹⁵/₁₆" wrench, torque wrench.


Roadster/Coupe

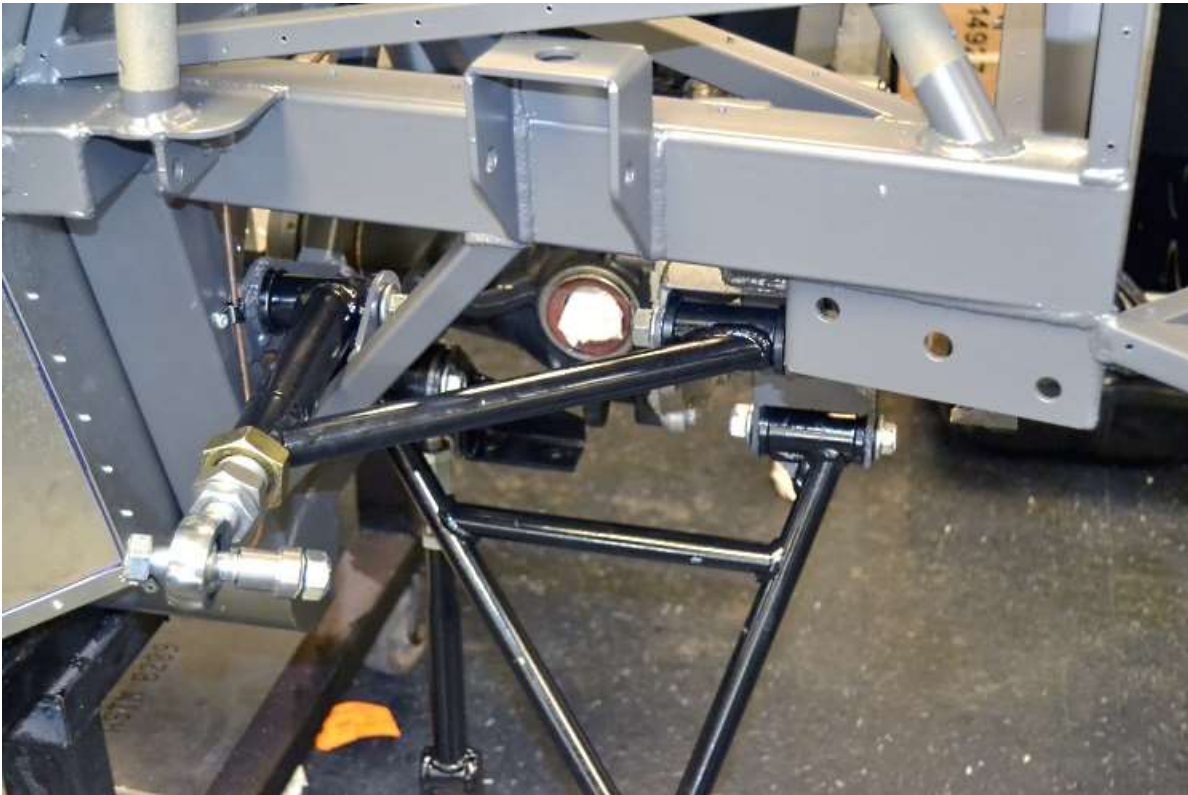

Pass the upper control arm thick tube through the triangular area as shown in between the frame mounts. Use the longer M16 x 110mm (~4⁵/₁₆"") bolts.

Hold the arm horizontal and torque the bolts to **135Nm (100 ft-lb)**.

Hot Rod

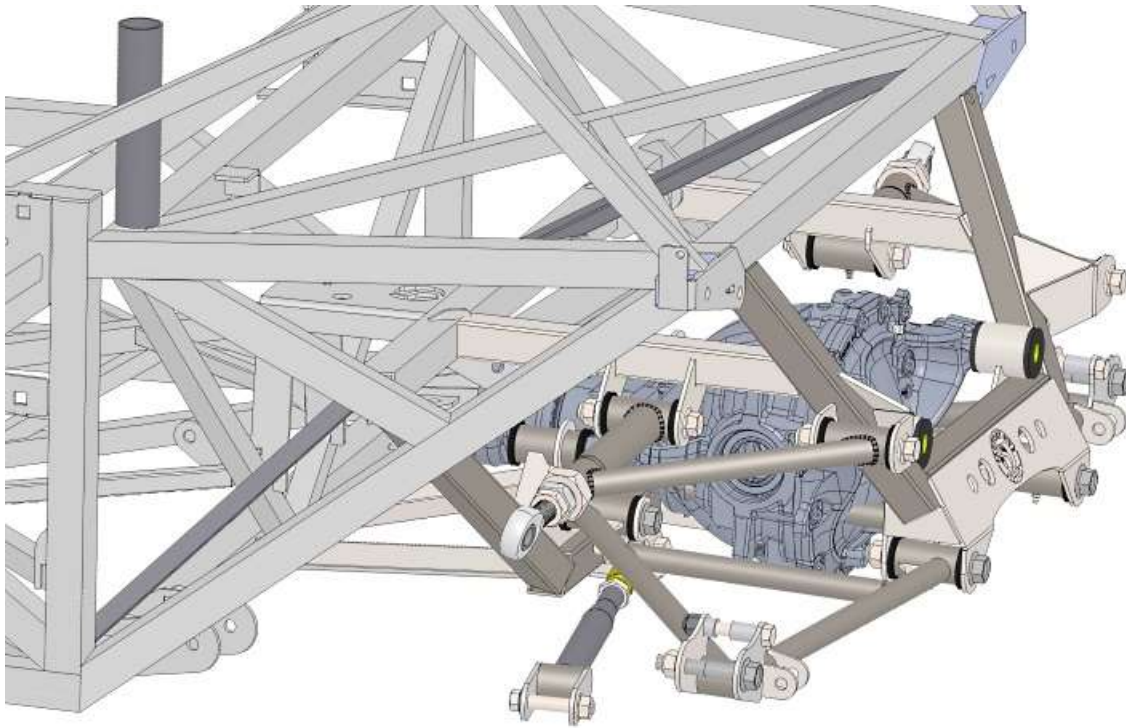


Attach the upper control arms to the frame with the thick tube at the front. Use the longer M16 x 110mm ($\sim 4\frac{5}{16}$ ") bolts.

Hold the arm horizontal and torque the bolts to **135Nm (100 ft-lb)**.

CV AXLE

 CV Axles, spindles

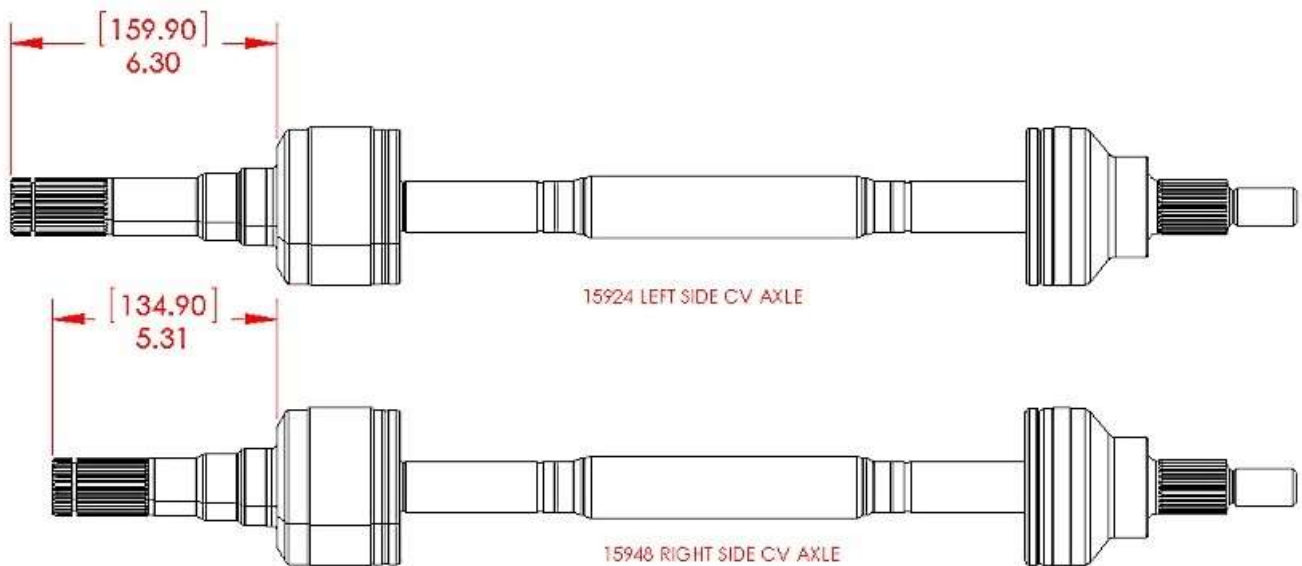


The inside CV joint is different for each side of the car, make sure to use the correct one when installing.



Using the correct axle, push the inner CV joint into the center section.



When fully installed there should be an $\frac{1}{8}$ " (~3mm) gap between the inside of the CV joint and the center section. If necessary, compress the CV axle and with the CV axle nut on the end hit the CV axle in with a plastic mallet. Pull on the inner CV joint to make sure that it does not come out.

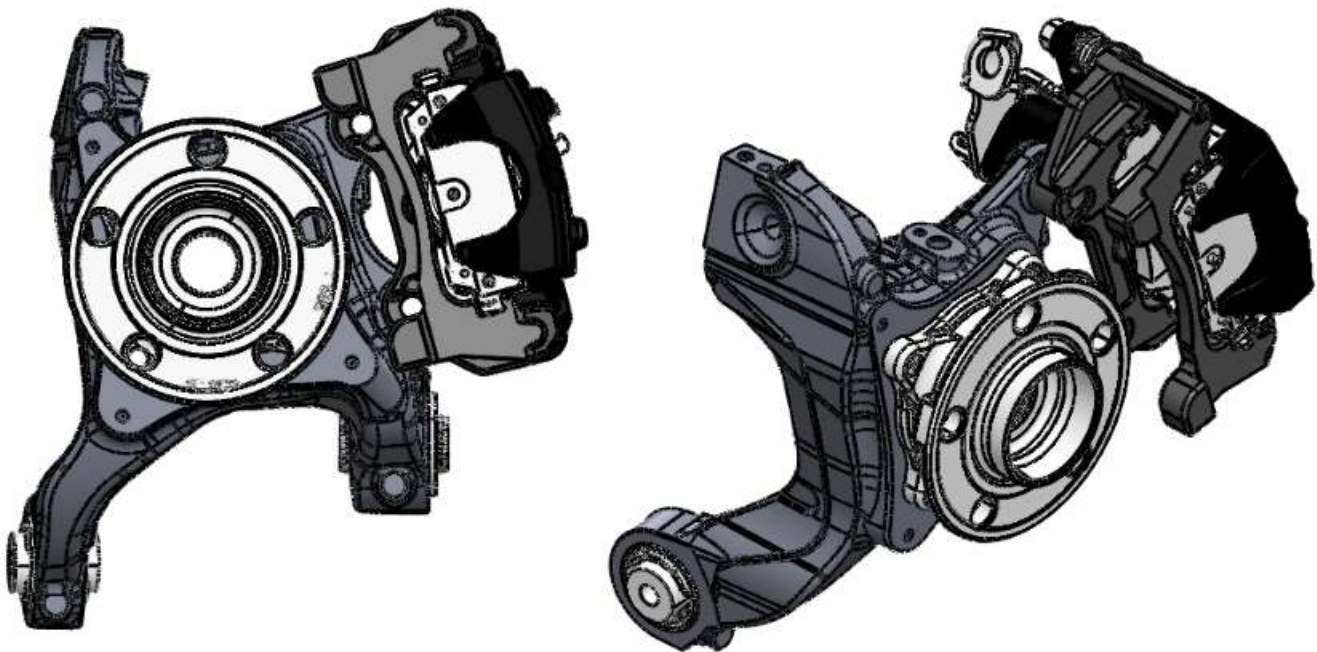

LEFT SIDE SPINDLE



Slide the spindle onto the outer CV joint and start the nut on the end.

SPINDLE

Lower arm



Connect the bottom of the spindle to the lower control arm using the M16 x 90mm bolts and locknuts. Right side shown.

Wait to torque the bolts until after the other arms are installed.

Upper arm



Insert the angled mount adapter into the upper arm rod end.



Attach the upper control arm to the spindle using the $\frac{5}{8}$ " x 3.50" bolt and locknut.

Wait to torque the bolts until after the other arms are installed.

Toe Link








Attach the Toe link arm to the spindle using the M14 x 80mm bolt and locknut.

Repeat for the right hand side.

Use the torque specifications page at the back of the instructions to torque the control arm to spindle bolts.

COIL-OVER SHOCK ASSEMBLY

-  Snap ring pliers, $\frac{3}{4}$ " wrench, $\frac{3}{4}$ " socket, Ratchet, floor jack
-  Front shock set, IFS Components, Insulated clip hardware.
-  The shocks are pre-valved at the factory in compression and rebound for good street use. The shocks can be adjusted in rebound as per Koni's instructions if so desired.
-  The Roadster/Coupe IRS springs are 400lb. The Hot Rod IRS springs are 300lb. Other springs are available for different ride characteristics.
-  **WARNING!** Incorrect assembly and maintenance of this part can cause serious injury or death.



Unpack the shocks, coil-over's and hardware.

Double check the jam nut under the rod end and bump stop to make sure that it is tight.
Screw the spring seat down on the sleeve so it is closer to the unthreaded end.



Slide the coil sleeve over the body of the damper beginning at the end which has the rubber bump stop.
The unthreaded end of the sleeve goes first so that it will sit on the snap ring on the shock body.



The coil-over hats have a snap ring which holds it in place. Remove this snap ring to assemble the coil over shock.




Slide the rubber bumper about two inches down on the shaft.



Put the spring and hat on the shock and rotate the spring seat back up the sleeve so that the spring pushes the hat tight against the end of the shock.



Install the snap ring on the spring hat so that it holds onto the shock end. Make sure that the slot in the snap ring and the slot in the spring hat are not aligned.

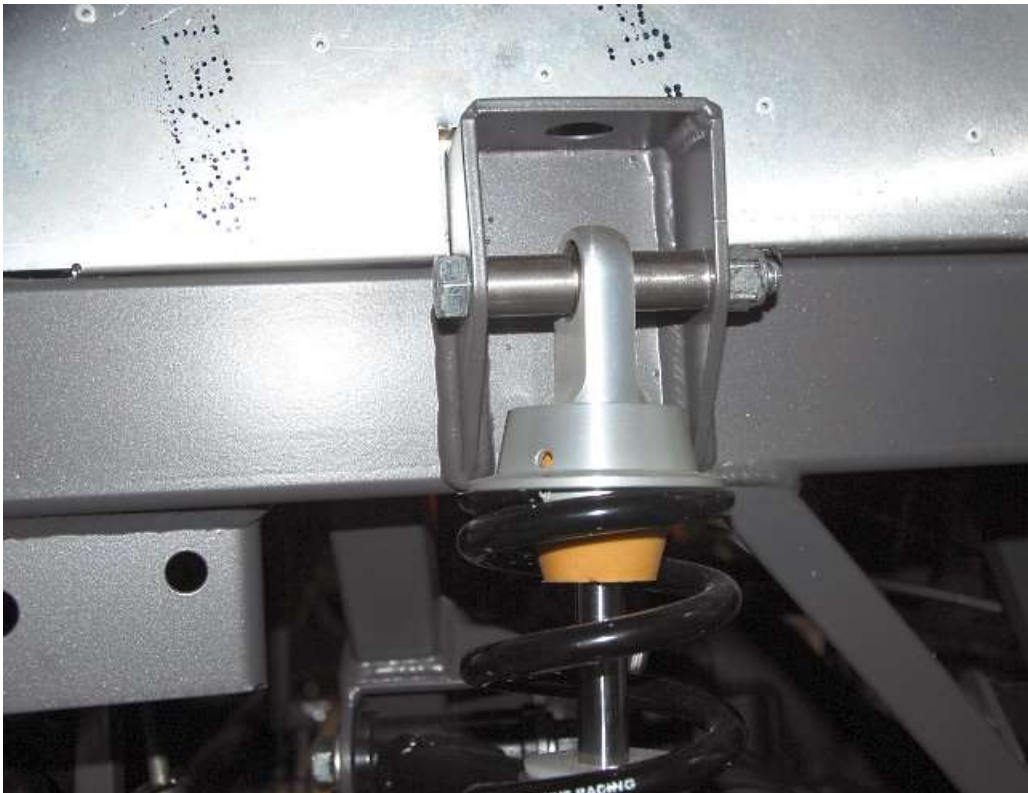

Roadster/Coupe - Attach the rod end of the shock to the upper shock mount using the two equal length 1.09" kit spacers.



Hot Rod - Attach the rod end of the shock to the upper shock mount using the two equal length 0.32" kit spacers. Make sure to insert the bolt from the front placing the nut to the rear of the car (allows you to remove the shocks when the car is complete).

Torque the upper shock bolt to **54Nm (40 ft-lb)**.



Jack the spindle up so the body end of the shocks can be mounted on the shock mount on the control arm using the longer 1.09" spacer on the back and $\frac{7}{16}$ " spacer in front of the shock.

Torque the lower shock bolt to **54Nm (40 ft-lb)**.
Remove the floor jack.

Optional IRS Brakes

Download the 2015 IRS brake instructions from www.factoryfiveparts.com/instructions and install the brakes.


Connect the brake hose to the brake caliper.

Torque the banjo bolt to **39 Nm (29 ft-lb)**.

Run the brake hose over to the frame while the suspension is in droop and keep the brake line slack to locate the frame mount.

Run the hard brake lines in the kit to the brake line mount.

ROADSTER E-BRAKE CABLES

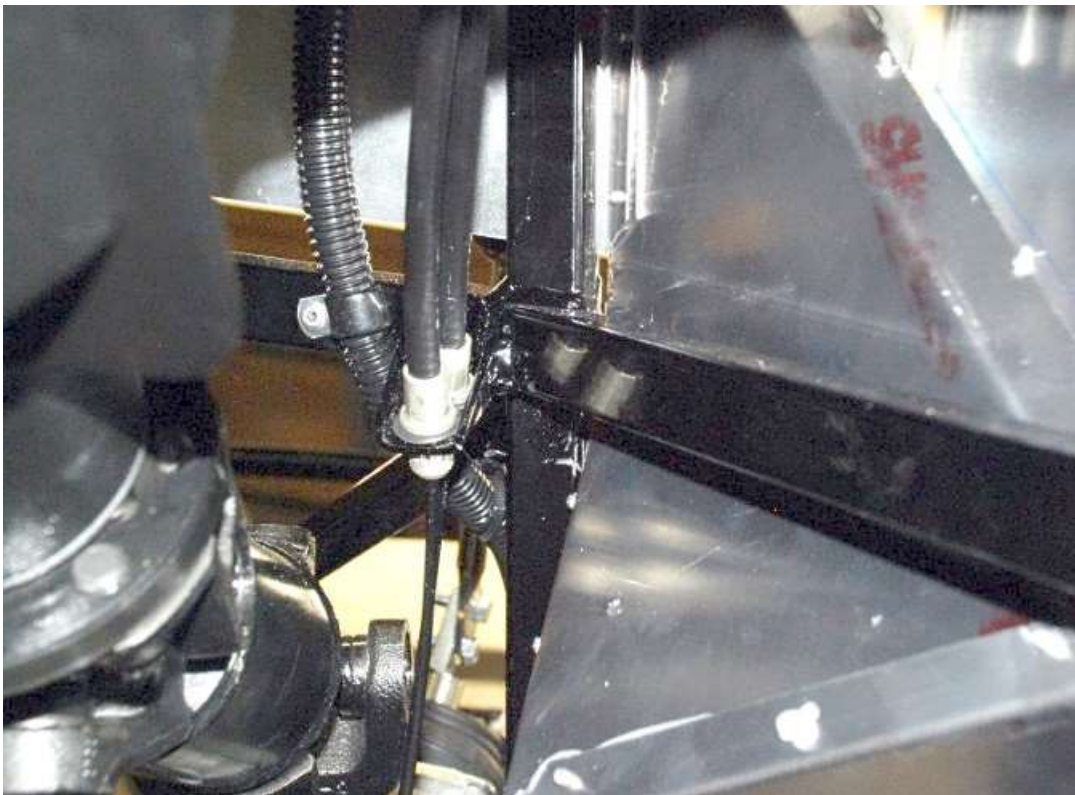

Make sure the FFR cables go through the upper bracket in the transmission tunnel until the sheath end clicks in place.

WILWOOD BRAKE ROUTING





Run the left e-brake cable over the top of the center section and left rear mount then down and over to the brake caliper.



Run the right cable over the center section and right rear mount then down and over to the brake caliper.


WILWOOD E-BRAKE ADAPTER

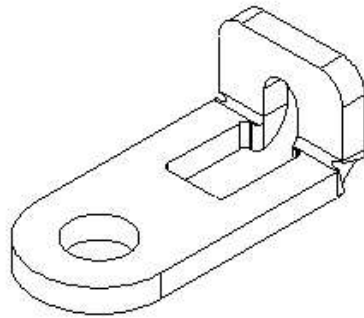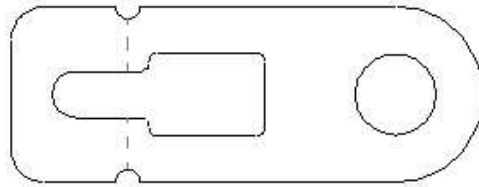

WILWOOD CALIPER E-BRAKE ADAPTER



Insert the cable end into the bent bracket then bolt the bracket to the e-brake lever.

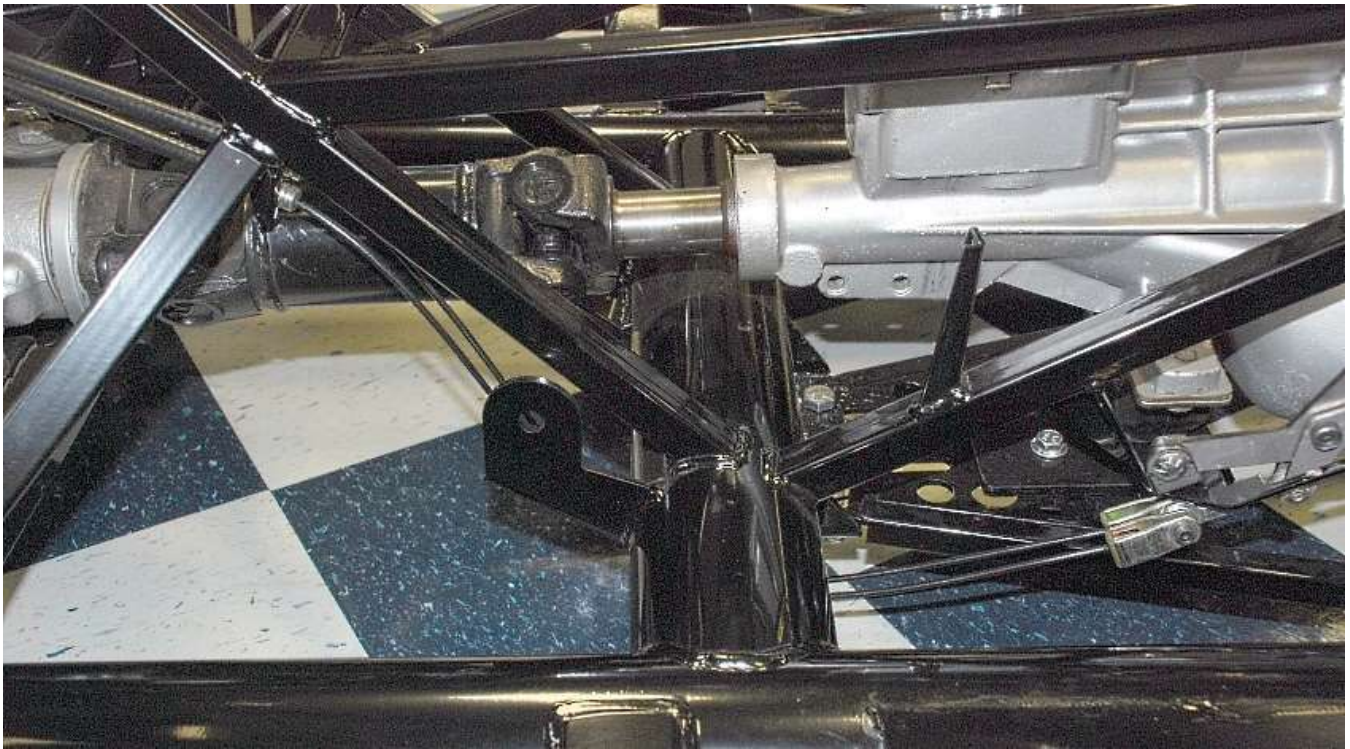

Make sure to run the other end of the brake cables under the 4" crossmember and connect them to the e-brake handle and adjust.



Hot Rod

E-BRAKE CABLES



Push the cables into the bracket forward and to the right of the center section on the frame.

Wilwood e-brake adapter

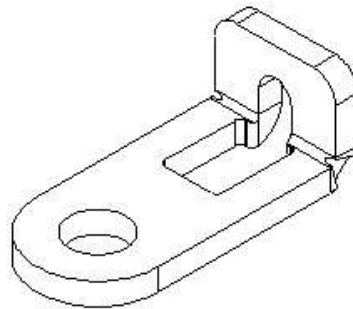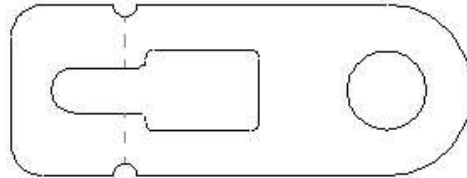

WILWOOD CALIPER E-BRAKE ADAPTER



Insert the cable end into the bent bracket then bolt the bracket to the e-brake lever.

WILWOOD BRAKE ROUTING



Run the left e-brake cable over the top of the center section and left rear mount then down and over to the brake caliper.



Run the right cable over the center section and right rear mount then down and over to the brake caliper.


DRIVESHAFT ADAPTER

- ✎ There are two different Driveshaft adapters, one for center sections from automatic cars which is coated clear zinc. The Driveshaft adapter for center sections from manual cars is coated yellow zinc.
- 🔧 Driveshaft adapter, fasteners
- 🔧 8mm hex socket, torque wrench, Loctite.

Apply the emergency brake.



Apply Loctite to the (6) M10 x 25mm socket head screws.

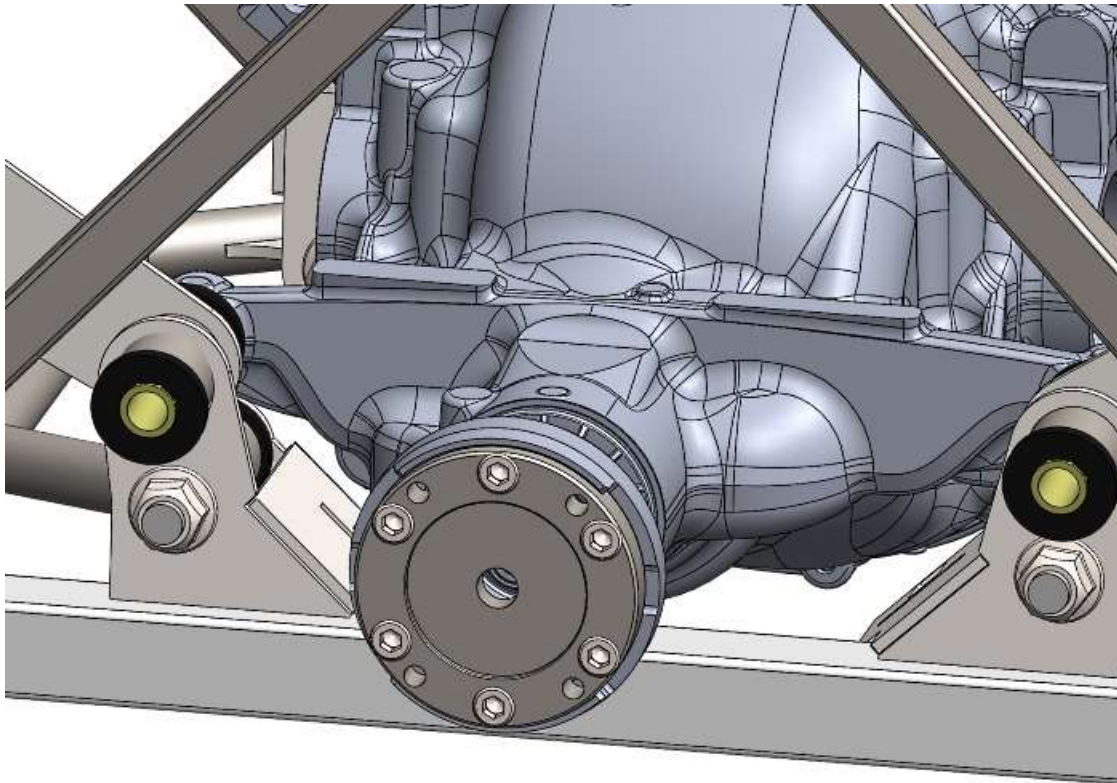

Attach the driveshaft adapter to the center section pinion flange and torque the bolts in a star pattern to **55Nm (41 ft-lb)**.



Insert the driveshaft into the transmission, bolt the rear flange to the driveshaft adapter and torque the bolts to **109Nm (80 ft-lb)**.

Fluids



Name	Specification
Motorcraft® Additive Friction Modifier (U.S.) XL-3 (U.S.)	EST-M2C118-A
Motorcraft® SAE 75W-85 Synthetic Hypoid Gear Lubricant XY-75W85-QL	WSS-M2C942-A

Fill the rear axle with fluids.

CAPACITIES

Fluid	Amount
SAE 75W-85 Synthetic Hypoid Gear Lubricant	3.15-3.30 pt (1.49-1.56 L)
Friction Modifier	3.0-3.5 oz (0.089-0.104 L)

Alignment specs

Camber: -0.5° to -0.75°

Total Toe: 1/8" Toe in

Torque Specifications

	LB-FT	Nm
CENTER SECTION TO FRAME FRONT	129	175
CENTER SECTION TO FRAME REAR	129	175
BRAKE CALIPER TO CALIPER BRACKET	24	32
BRAKE CALIPER BRACKET TO SPINDLE	129	175
BRAKE HOSE BANJO BOLT TO CALIPER	29	39
LOWER CONTROL ARM TO FRAME	100	135
LOWER CONTROL ARM TO SPINDLE	100	135
TOE LINK TO FRAME	100	135
TOE LINK TO SPINDLE	100	135
UPPER CONTROL ARM TO FRAME	100	135
UPPER CONTROL ARM TO SPINDLE	100	135
HUB TO SPINDLE	98	133
CV AXLE NUT	98	133
DRIVESHAFT ADAPTER TO PINION FLANGE	41	55
DRIVESHAFT TO DRIVESHAFT ADAPTER	80	109

THEN ROTATE 45°